



## California Air Tools Light & Quiet 1P1060S Portable Air Compressor



0.6 HP  
(Rated/Running) -  
1.2 HP Peak

1.0 Gallon Steel Tank

1.60 CFM @ 40  
PSI


1.20 CFM @ 90 PSI

The California Air Tools Light & Quiet 1P1060S Portable Air Compressor is designed to be one of the quietest air compressors in the industry having only 56 decibels of sound.





The .6 HP motor operates at only 1680 RPM creating less noise and less wear.

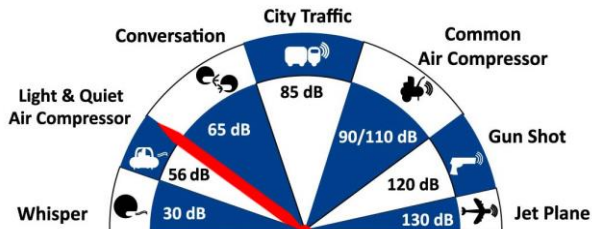

ULTRA QUIET

ONLY 56 DB NOISE LEVEL

The Ultra Quiet & Oil-Free IP 90945 Motor is a Large Single Piston Pump design engineered for high performance and durability.

The 1.0 Gallon Steel Air Tank is Lightweight (29 lbs) making it very easy to transport.

The 1P1060S Air Compressor has a Oil-Free Single Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 250 hours or less.

The Oil-Free Pump allows for use in a variety of different temperatures (cold) and uneven terrains

The 1P1060S produces 1.2 CFM @ 90 PSI allowing you to use staple guns, brad nail guns, finish nail guns, nail guns, airbrushes, and blow guns.



1P1060S

LIGHT & QUIET PORTABLE AIR COMPRESSOR

Quiet  
Only 56 Decibels!

Designed for High Performance, Reliability and to be one of the Quietest Air Compressors in the industry

Oil-Free Pump  
(Bomba libre de aceite)

Pressure Control Meter  
(Medidor de presión)

Universal Quick Connector  
(Conector universal)

0.6 HP Motor (Rated/Running)  
1.0 Gallon Steel Tank  
1.60 CFM @ 40 PSI  
1.20 CFM @ 90 PSI

Thermal Overload Protector  
(Protector de sobrecarga térmica)

Lightweight Steel Air Tank  
(Tanque de acero)

Designed to last longer than competitive Air Compressors and have a Pump life before service of 3000 plus hours.\*  
\*Life cycle is based on normal working conditions

QUIET - LIGHTWEIGHT - OIL-FREE - LONG LIFE - LESS MAINTENANCE

---

## FEATURES

- \* **Ultra Quiet - Only 56 decibels**
- \* Oil-Free Pump - Cleaner air for better tool operation.  
Less maintenance and Costs.
- \* Two pressure control gauges
- \* One - Female industrial "Push to Connect" quick connector
- \* Produces less heat which dissipates efficiently
- \* Thermal Overload Protector
- \* External Current Protector
- \* 120 PSI Maximum Pressure
- \* 110v / 60 hz - Generator 2000 (running) Watts Min.
- \* Low Amp Draw - 4.5 Amps
- \* Tank fill rate from empty to full - 50 Seconds
- \* Recovery time from 90 PSI to 120 PSI - 15 Seconds
- \* Duty Cycle - 70/30
- \* Maximum continuous running 30-60 min. (Depending PSI & CFM)
- \* Steel Air Tank - Lightweight Only 29 pounds
- \* L (12.5") x W/D (14.7") x H (14.75")
- \* Comes complete with Air Filter
- \* ETL Certified
- \* 1 Year Limited Warranty
- \* Commercial Use: Refer to State & City Codes

For more information and to watch a 1P1060S product demonstration please visit California Air Tools:  
<https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/3-5-hp-air-compressor/cat-1p1060s/>